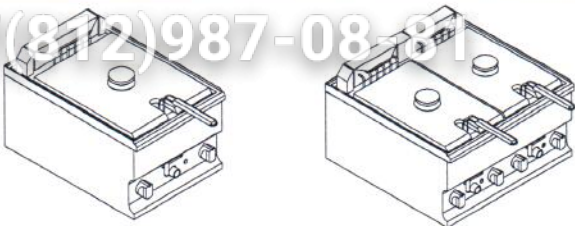






CODE	TYPE	DRAWING		
16909	EF-40/1			
20564	EF-60/2			
SPARE PARTS	CODE DRAW.No.	DESCRIPTION	REF.	REMARK
	05710 107.1.517	CONNECTION CABLE dim.: 5X2,5mm ² X1500		
	72055 TS-0645	HEATING ELEMENT power: 1800 W voltage: 230 V dim.: 318x78 mm		
	73477 TS-1017	END SWITCH el. load: 16A (4) 250V pole: 1		
	73101 TS-1019	CONTACTOR DIL OOM-10 voltage: 230 V rated current: 20A		replaced with contactor 73112
	73454 TS-1011	SWITCH ON-OFF el. load: 16A/250V-10A/380V poles: 4		
	74155 TS-1016	THERMOSTAT operating temp.: 40-180°C el. load: 16 (4)A/380V pole: 1 capillary: L=1570 mm		replaced with thermostat 72553
	08262 107.2.292	DRAIN TUBE dim.: Ø 19 / Ø 22 mm		

electric fryers - spare parts

SPARE PARTS	CODE DRAW.No.	DESCRIPTION	REF.	REMARK
	42341 TS-0923	DRAIN VALVE 3/4"		
	73181 TS-1033	SAFETY-THERMOSTAT temperature limit: 218°C el. load: 20 (4)A/380V poles: 3 capillary: L= 2310 mm		replaced with safety- thermostat 72577
	83287 TS-1018	HANDLE OF LID		replaced with handle of lid 83366 with special procedure
MODIFICATION REALIZED: JULY 2003 - safety-thermostat 73181 is completely replaceable with safety-thermostat 72577 - thermostat 74155 is completely replaceable with s thermostat 72553				
	72577 TS-1365	SAFETY-THERMOSTAT temperature limit: 228°C el. load: 20 (4)A/380V poles: 3 capillary: L= 2210 mm		
	72553 TS-1364	THERMOSTAT operating temp.: 40-180°C el. load: 16 (4)A/380V pole: 1 capillary: L=1580 mm		
MODIFICATION REALIZED: APRIL 2004 - handle of lid 83287 (screw 61015 M5x15) is replaceable with handle of lid 83366 only with following procedure: 1. cut of screw M5x15 2. drill a hole Ø 6 3. from lower side insert the screw M6x20 and screw up the handle of lid 83366				
	83366 TS-1369/2	HANDLE OF LID colour: black		
MODIFICATION REALIZED: MARCH 2006 - contactor 73101 is completely replaceable with contactor 73112				
	73112 TS-1521	CONTACTOR DIL M7-10 voltage: 230 V		